



# LEADER TIC 4.1

High Resolution Thermal imaging camera

## Efficient and small = 1 button + 4" display

Particularly suitable for the first attack. LEADER TIC 4.1 offers unbeatable value and best quality, ideal for firefighting, first attack, search for missing persons and fire...




### Outstanding features:

- **Compact** 175 x 145 x 97 mm
- Lightweight **990gr** with 2 batteries and side straps.
- **Large 4" display** for detailed visibility
- **Widest detection range:** -40°C to +1150°C
- **1 colorization mode**
- **Picture Capture and / or Video recording** (option)
- **Batteries:** 6 year warranty, 5000 charging cycles
- **Safe batteries (LiFePO4):** for high temp operations
- **Up to 8h running time** (2 batteries) with **Eco-Boost-System**
- **Germanium window to protect the optics**
- **Removable Pistol grip** option
- **Boot time: less than 5 sec**
- **1 Large button:** easy to operate even with gloves
- **Functions:**
  - ON/OFF
  - Image freeze & picture capture (option)
  - Continuous video recording (option)



### Colour schemes:

LEADER TIC 4.1 offers one colour scheme: **Fire** (standard) or optional **Search** (instead of Freeze)

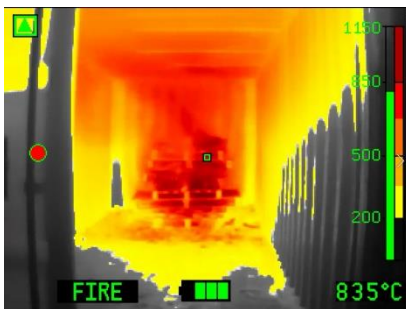

**FIRE (STD):**  
 Dark Red >850°C  
 Red > 675°C  
 Orange > 500°C  
 Dark Yellow >350°C  
 Yellow > 200°C  
 White = Hot  
 Black = cold



**SEARCH (option):**  
 2 hottest % coloured in Red and the 5 following hottest % in Yellow-Orange.

### 3 Sensitivity modes with automatic switch according observed scene:

- High sensitivity temperature range: -40 +150°C
- Medium sensitivity temperature range: -40 + 500°C
- Low sensitivity temperature range: -40 +1150°C



As part of our policy of constantly researching to improve our equipment, we reserve the right to change the characteristics of our apparatus at any time without prior notice.  
 ZF.07.326.EN.5



# Characteristics:

Leader TIC 4.1 with Eco-Boost-System	
Dimensions	L.175 x W.145 x H.97 mm (H = +110mm with optional pistol grip)
Weight	990g with 2 batt / 905g with 1 batt (+170g with optional pistol grip)
Display	4" LCD / 320 x 240 (76.800) px / Backlighting / Brightness: 800 cd/m <sup>2</sup>
Frequency	60Hz Fps
T°C Range	-40° to +1150°C
Colorization	Std: Fire, And / Or Search
Housing	
Material	PUR / Elastomer
Drop Test	2m on concrete
IP	IP67 / 1 Meter 30 Minutes
Heat resistance	150°C for 15min / 260°C for 5min
Sensor	
Micro bolometer type	Uncooled 17μ Amorphous Silicon aSi Resolution <b>384 x 288</b> (110 592 px)
Spectral range	7 – 14 μm
Thermal sensitivity	NETD: <50mK (<0.05°C)
Optics	
Material	Germanium Carbon Coated Protected by a germanium window
Focus	0,35m to infinity / F/1.3 speed
Visual field / FOV	H: 51° / V: 40° / Diagonal: 65°

General	
Rechargeable batteries	LiFePO <sub>4</sub> (Lithium Iron Phosphate = safety VS fire), 2.5Ah at 6.6V, 85g
Running time (20°C) with Eco-Boost-System since October 2018	<b>Without video/photo functions:</b> >8h (2 batt) / >4h (1 batt) <b>With video/photo functions:</b> >6h (2 batt) with non-active video >5h (2 batt) with recording video
Boot time	< 5 seconds
Charging voltage	12-24 VDC or 100-240 VAC
Charging time (for 2 batt / consider half for 1 batt)	Charging bay and Mains charger: 100% in ~2h, 90% in ~1h30, 80% in ~1h20
Charging cycles	> 5000
Memory (optional)	8GB internal SD card (8h video or 1000 pics)
Warranty	<b>5 years</b> on camera / <b>6 years</b> on batteries / <b>10 years</b> on thermal sensor / <b>1 year</b> on accessories (chargers, charging bay, etc...)
Options	
Removable pistol grip	Picture capture and/or video recording (8GB capacity)
Neck strap in flame retardant material	Vehicle charging bay or mains charger
1 or 2 Retractable lanyards	Carrying case IP67
Protection hood	Wireless video transmission to computer, tablet or smartphone



## Energy concept

LiFePO<sub>4</sub> batteries (lithium-iron-phosphate).


### Benefits:

- Very long lifespan guaranteed 5000 charging cycles (~10 years)
- Operating time (up to 8h with 2 batteries at the same time in the camera)

## Picture capture & Video recording

Pictures (up to 1000) and Video (up to 8h) can be:

- viewed on the camera screen during operation
- Live Pictures can be sent to a computer, tablet or smartphone thanks to optional wireless stick.
- Downloaded into a computer via a USB cable

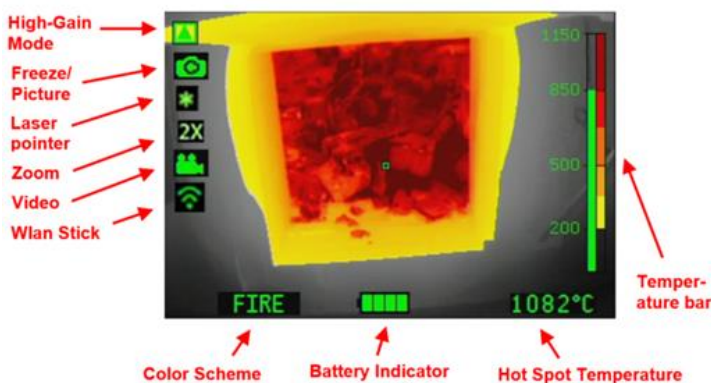

## Vehicle Charging Bay

Very space-saving mountable! Power supply 12/24 VDC or 100-240 VAC. Can charge up to 4 batteries at the same time (2 in the camera and 2 spares)



As part of our policy of constantly researching to improve our equipment, we reserve the right to change the characteristics of our apparatus at any time without prior notice.  
ZF.07.326.EN.5

**LEADER**<sup>®</sup>  
● Fighting for performance












## Camera standard features:

Designation	Colour modes		Features					
	Color modes	Max color modes	Battery	Freeze mode	Side trap	Video recording	Picture capture	USB cable
LEADER TIC 4.1 (1CS)	Fire (std.)		1 or 2	√	2			
LEADER TIC 4.1 (2CS)	Fire (std.) + Search		1 or 2		2			
LEADER TIC 4.1 P	Fire (std.)		2	√	2		√	√
LEADER TIC 4.1 V	Fire (std.)		2	√	2	√	√	√

P = Picture

V= Video + Picture

## Camera optional accessories:

	<b>Wireless Transmission kit</b>	Only compatible with cameras equipped with Video recording		<b>Vehicle charging bay with additional slots</b>	Charge batteries in the camera + 2 extra spare batteries
	<b>Pack of 2 spare batteries</b>			<b>Power supply for charging bay</b>	Exist in 12/24V and 100V-240V with US or EU plug
	<b>Cable charger for TIC 3 &amp; 4</b>	Available in 12/24V or 100V- 240V		<b>Retractable lanyard</b>	500gr or 1000gr tension force
	<b>Watertight Carrying case</b>	IP67		<b>Neck strap</b>	Fire-proof (Kevlar)
	<b>Vehicle charging bay</b>	Charge batteries inside the camera		<b>Protection hood</b>	Increases time exposure x2 to high temperatures
				<b>Removable pistol grip</b>	Pistol grip = 170g Incl. mounting tool



As part of our policy of constantly researching to improve our equipment, we reserve the right to change the characteristics of our apparatus at any time without prior notice.  
ZF.07.326.EN.5

**LEADER**<sup>®</sup>  
Fighting for performance